


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 16 TOWNSHIP 16 RANGE 2
DATE: 9-20-05
PARTY CHIEF: Kiste
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 5-25-00

IN. S.P.C. E ZONE NAD '83
NAME: 16021601
N: 509664.4060(m)
E: 43426.5550(m)

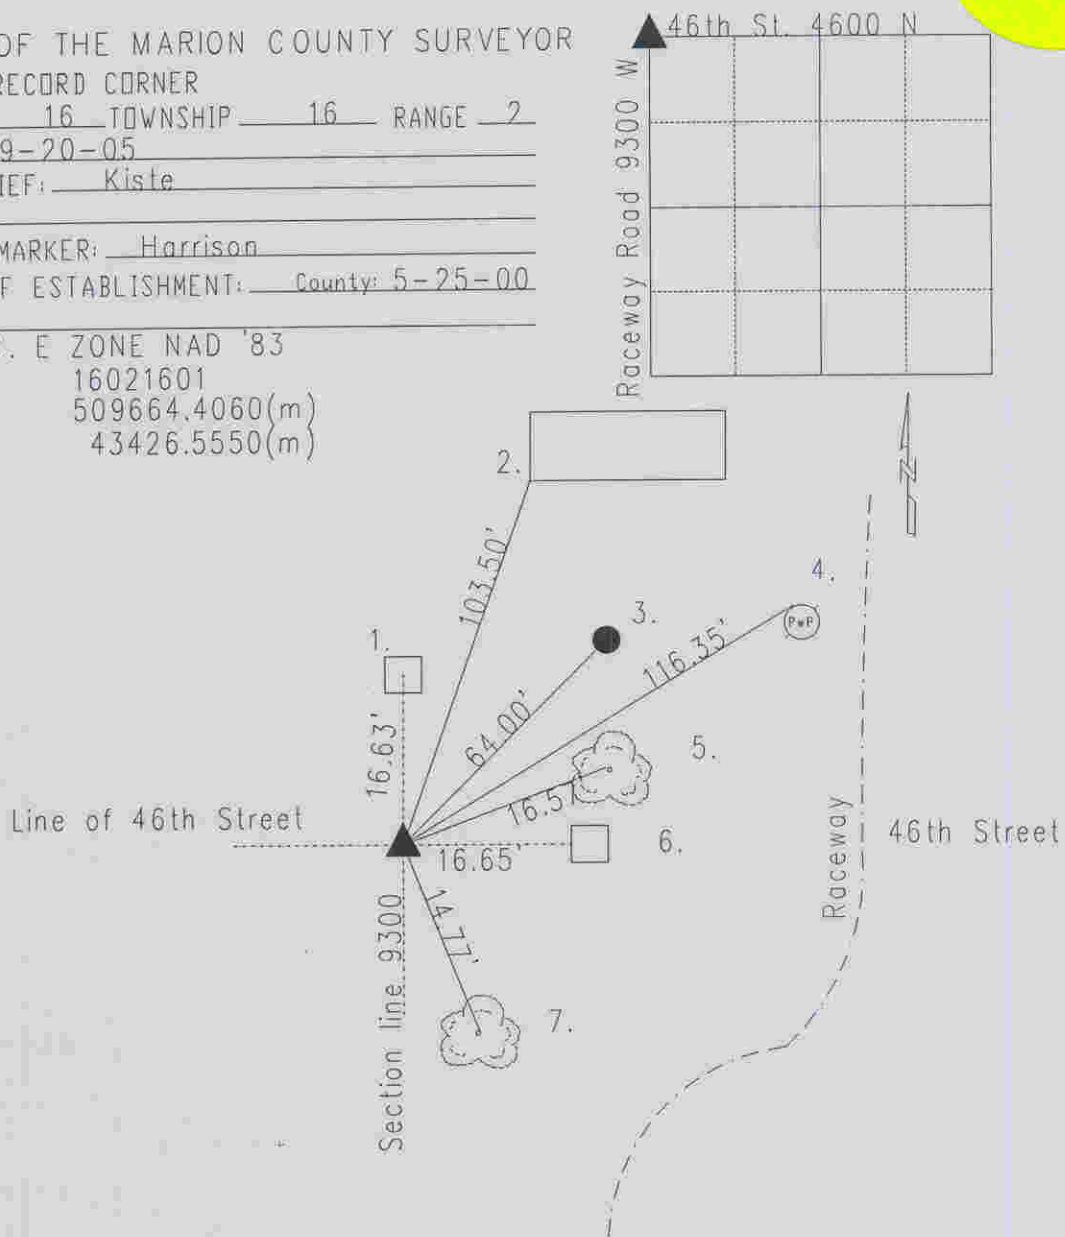

Original post set 1820 by Laughlin with witness: 30" white oak N 9 W 3 links, 12" beech S 20 E 12 links per Marion County Atlas, pg. 3. 9-6-85 ties called for stone, per Mid States Engineering established 8-6-76. Excavated 8-5-86 stone found at surface. Harrison set. Re-tied 6-13-95 by Whiteside. Re-tied 5-25-00 by Kiste. Re-tied 9-20-05 by Kiste.

16021601

REF.	DISTANCE	DESCRIPTION
1.	16.63'	North to iron pin in 4"x4" concrete monument
2.	103.50'	SW corner of steel garage #5090
3.	64.00'	Face bib stand pipe
4.	116.35'	PK nail NW PWP#79-530 4"up
5.	16.57'	Mag nail w/washer N 12" maple 36"up
6.	16.65'	East to iron pin in 4"x4" concrete monument
7.	14.77'	Mag nail w/washer W 18" cherry 24"up